

Specification/standard

规范 / 标准

Specification	IEC 61984
规范	IEC 60664-1
	IEC 61373
Authentication	
认证	

Insert 插芯

接插件针数	6/36+PE
Number of contacts	
依据 IEC61984 的额定电压	
Rated voltage according to IEC61984	
电力区	
Power area	
额定电流	40A
Rated current	
额定电压	690V
Rated voltage	
额定脉冲电压	8kV
Rated impulse voltage	
污染程度	3
Pollution degree	
信号区	
Signal area	
额定电流	10A
Rated current	
额定电压	160V
Rated voltage	
额定脉冲电压	2.5kV
Rated impulse voltage	
污染程度	3
Pollution degree	
依据 UL/USA 的额定电压	600/300V
Rated voltage according to UL/USA	
绝缘电阻	$\geq 10^{10}\Omega$
Insulation resistance	
材料	阻燃 PC
Material	Flame retardant PC
温度范围	-40°C~+125°C
Limiting temperatures	
阻燃等级	EN45545-2:R22/R23 UL94-V0
Flame retardant grade	
机械寿命	≥ 500 次
Mechanical life	

Contacts

插针

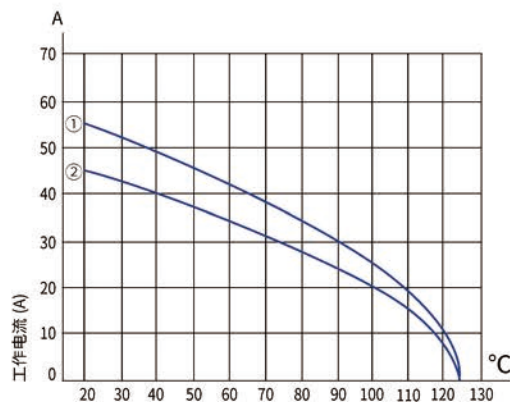
强电针	
Strong electricity contacts	
材料	铜合金
Material	Copper alloy
表面处理	镀银
Surface treatment	Silver plated
接触电阻	$\leq 0.5m\Omega$
Contact resistance	
冷压连接	
Crimp terminal	
mm ²	1.5-6mm ²
AWG	16-10
最大芯线直径	6.5mm
Maximum core diameter	
信号针	
Signal contacts	
材料	铜合金
Material	Copper alloy
表面处理	镀金 / 银
Surface treatment	Gold/silver plated
接触电阻	$\leq 2.5m\Omega$
Contact resistance	
冷压连接	
Crimp terminal	
mm ²	0.14-2.5mm ²
AWG	26-14

电流承载能力

Current carrying capacity

连接器的电流承载能力受接触件和绝缘部件的热负荷能力限制。降额曲线在不超过允许的最高温度下，有限显示电流均匀持续地通过连接器的每个接点。测试方法参照 DIN EN 60512-5。

The current carrying capacity of the connector is limited by the thermal load capacity of the contact and insulating parts. Under the condition that the derating curve does not exceed the maximum allowable temperature, the limited display current uniformly and continuously passes through each contact of the connector. The test method refers to DIN EN 60512-5.



环境温度 (°C)

 ① 导体截面积: 6.0mm²

 ② 导体截面积: 4.0mm²

Ambient temperature (°C)

 ① Conductor cross section : 6.0mm²

 ② Conductor cross section : 4.0mm²

针数量 Number of contacts

6/36 +







Shell size: matching 16A/16B shell

外壳尺寸: 匹配 16A/16B 外壳

Description		Specification	Order number		比例图 尺寸单位 (mm)													
描述		型号	订货号		Scale drawings Dimension unit													
			公插芯 Male	母插芯 Female														
冷压连接 冷压针 需单独订购 Crimp terminal, crimp contacts need to be ordered separately		HDC-HK6/36-MC	113060100523															
					接插体之间最大距离 21mm Maximum distance between connectors is 21mm													
		HDC-HK6/36-FC		113060200513														
					面板安装开孔尺寸 接触面孔位排布 Panel mounting hole size Contact position arrangement													
Description		Conductor section	Order number		比例图 尺寸单位 (mm)													
描述		导线截面 (mm ²)	订货号		Scale drawings Dimension unit													
10A 压接针			公针 Male	母针 Female														
镀金 Gold plated		0.5	115210010802	115310016102														
		0.75-1.0	115210010804	115310016104														
		1.5	115210010805	115310016105														
		2.5	115210010901	115310016106														
		0.14-0.37	115210010801	115310016101														
镀银 Silver plated		0.5	115210010807	115310016108	Wire gauge Stripping length													
		0.75-1.0	115210010809	115310016110	<table border="1"> <thead> <tr> <th>线规</th> <th>剥线长度</th> </tr> </thead> <tbody> <tr> <td>0.5mm²</td> <td>AWG20 8mm</td> </tr> <tr> <td>0.75-1mm²</td> <td>AWG18 8mm</td> </tr> <tr> <td>1.5mm²</td> <td>AWG16 8mm</td> </tr> <tr> <td>2.5mm²</td> <td>AWG14 6mm</td> </tr> <tr> <td>0.14-0.37mm²</td> <td>AWG26-22 8mm</td> </tr> </tbody> </table>		线规	剥线长度	0.5mm ²	AWG20 8mm	0.75-1mm ²	AWG18 8mm	1.5mm ²	AWG16 8mm	2.5mm ²	AWG14 6mm	0.14-0.37mm ²	AWG26-22 8mm
线规	剥线长度																	
0.5mm ²	AWG20 8mm																	
0.75-1mm ²	AWG18 8mm																	
1.5mm ²	AWG16 8mm																	
2.5mm ²	AWG14 6mm																	
0.14-0.37mm ²	AWG26-22 8mm																	
		1.5	115210010810	115310016111														
		2.5	115210010902	115310016112														
		0.14-0.37	115210010806	115310016107														

Description	Conductor section	Order number		Scale drawings	Dimension unit
描述	截面积 (mm ²)	订货号		比例图	尺寸单位 (mm)
40A 接触对		公针	母针		
40A Contact Pairs		Male	Female		
	1.5	114020501230	114021001146		
	2.5	114020501229	114021001145		
	4	114020501228	114021001144		
	6	114020501227	114021001141		
		Wire gauge		Stripping length	
		线 规		剥线长度	
		1.5mm ²	AWG16	9mm	
		2.5mm ²	AWG14	9mm	
		4mm ²	AWG12	9mm	
		6mm ²	AWG10	10mm	











* 更多针孔详见 181、183 页，压接工具详见 180 页 -1-2，退针工具详见 179 页 -1-3

Number	Series	Scope of application	Specification	Order number	Place of production
序号	系列	适用范围	型号	订货号	产地
1	HDC-HD 系列退针器 HDC-HD series contacts retractor 	10A 公针 10A male contacts	HDC-HD-CX	113030400143	四川 - 绵阳 Sichuan-mianyang
		10A 母针 10A female contacts	HDC-HD-CX	113030400143	四川 - 绵阳 Sichuan-mianyang
2	HDC-HE 系列退针器 HDC-HE series contacts retractor 	16A 公针 16A male contacts	HDC-HE-CX	113030400142	四川 - 绵阳 Sichuan-mianyang
		16A 母针 16A female contacts	HDC-HE-CX	113030400142	四川 - 绵阳 Sichuan-mianyang
		16A 公针 16A male contacts	HDC-HE-CX/P	113030400146	四川 - 绵阳 Sichuan-mianyang
		16A 母针 16A female contacts	HDC-HE-CX/P	113030400146	四川 - 绵阳 Sichuan-mianyang
3	HDC-HMC 系列退针器 HDC-HMC series contacts retractor 	40A 公针 40A male contacts	HDC-HC-CX	113030400144	四川 - 绵阳 Sichuan-mianyang
		40A 母针 40A female contacts	HDC-HC-CX	113030400144	四川 - 绵阳 Sichuan-mianyang
		40A 公针 40A male contacts	HDC-HC-CX/P	113030400148	四川 - 绵阳 Sichuan-mianyang
		40A 母针 40A female contactsc	HDC-HC-CX/P	113030400148	四川 - 绵阳 Sichuan-mianyang
4	HDC-HDsub 系列退针器 HDC-HDsub series contacts retractor 	5A 公针 5A male contacts	HDC-DSUB9-CX	113030400145	四川 - 绵阳 Sichuan-mianyang
		5A 母针 5A female contacts	HDC-DSUB9-CX	113030400145	四川 - 绵阳 Sichuan-mianyang
5	HDC-HM200 系列退针器 HDC-HM200 series contacts retractor 	200A 公针 200A male contacts	HDC-HM200-CX	112980003652	四川 - 绵阳 Sichuan-mianyang
		200A 母针 200A female contacts	HDC-HM200-CX	112980003652	四川 - 绵阳 Sichuan-mianyang
6	HDC-HM2C100 系列退针器 HDC-HM2C100 series contacts retractor 	100A 公针 100A male contacts	HDC-HM2C100-CX	112980003651	四川 - 绵阳 Sichuan-mianyang
		100A 母针 100A female contacts	HDC-HM2C100-CX	112980003651	四川 - 绵阳 Sichuan-mianyang

 系列 / A 系列
 系列 / B 系列
 系列 / C 系列
 系列 / D 系列
 系列 / E 系列
 系列 / F 系列
 系列 / G 系列
 系列 / H 系列
 系列 / I 系列
 系列 / J 系列
 系列 / K 系列
 系列 / L 系列
 系列 / M 系列
 系列 / N 系列
 系列 / O 系列
 系列 / P 系列
 系列 / Q 系列
 系列 / R 系列
 系列 / S 系列
 系列 / T 系列
 系列 / U 系列
 系列 / V 系列
 系列 / W 系列
 系列 / X 系列
 系列 / Y 系列
 系列 / Z 系列

重载附件

Number	Series	Crimping wire diameter	Specification	Order number	
序号	系列	压接线径	型号	订货号	
1	5A/10A 	0.34-4mm ²	M22520/1-01(DMC)	531030600020	
2	16A/40A 	0.34-10mm ²	KNIPLEX 四心轴压线钳 (97 52 65) KNIPLEX Four spindleCrimping pliers (97 52 65)	531030600052	
3	70A/350A 	6-120mm ²	EK60/22L	531030600010	
		配套压接工装 Matching crimping tooling			
		编码 Code	名称 Name	备注 remarks	
		531030600074	EK60/22 六方带点压模 6mm ² EK60/22 Hexagonal point pressing die 6mm ²		
		531030600075	EK60/22 六方带点压模 10mm ² EK60/22 Hexagonal point pressing die 10mm ²		
		531030600076	EK60/22 六方带点压模 16mm ² EK60/22 Hexagonal point pressing die 16mm ²		
		531030600077	EK60/22 六方带点压模 25mm ² EK60/22 Hexagonal point pressing die 25mm ²		
		531030600078	EK60/22 六方带点压模 35mm ² EK60/22 Hexagonal point pressing die 35mm ²		
		531030600079	EK60/22 六方带点压模 50mm ² EK60/22 Hexagonal point pressing die 50mm ²		
		531030600066	EK60/22 六方带点压模 70mm ² EK60/22 Hexagonal point pressing die 70mm ²		
531030600067	EK60/22 六方带点压模 95mm ² EK60/22 Hexagonal point pressing die 95mm ²				
531030600068	EK60/22 六方带点压模 120mm ² EK60/22 Hexagonal point pressing die 120mm ²				
531030600068	EK60/22 六方带点压模 120mm ² EK60/22 Hexagonal point pressing die 120mm ²				
4	650A 	150-240mm ²	EK120/42L	531030600100	
		配套压接工装 Matching crimping tooling			
		编码 Code	名称 Name	备注 remarks	
		531030600069	EK120/42 六方带点压模 150mm ² EK120/42 Hexagonal point pressing die 150mm ²		
		531030600070	EK120/42 六方带点压模 185mm ² EK120/42 Hexagonal point pressing die 185mm ²		
531030600071	EK120/42 六方带点压模 240mm ² EK120/42 Hexagonal point pressing die 240mm ²				

Number	Description	Conductor section	Order number		Scale drawings	Dimension unit																			
序号	描述 接触对 Contact Pairs	截面积 (mm ²)	订货号		比例图	尺寸单位 (mm)																			
			公针 Male	母针 Female																					
5A Crimp contacts HDC-HDsub/M25/M2x8 series Gold plated	5A 冷压针孔 HDC-HDsub/M25/M2x8 系列 镀金	0.35	115260015501	115360015901	 																				
		0.5	115260015502	115360015902																					
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Stripping length</th> </tr> <tr> <th>线规</th> <th>剥线长度</th> </tr> </thead> <tbody> <tr> <td>0.35mm²</td> <td>AWG26-22</td> <td>5mm</td> </tr> <tr> <td>0.5mm²</td> <td>AWG22-20</td> <td>5mm</td> </tr> </tbody> </table>		Wire gauge	Stripping length	线规	剥线长度	0.35mm ²	AWG26-22	5mm	0.5mm ²	AWG22-20	5mm										
Wire gauge	Stripping length																								
线规	剥线长度																								
0.35mm ²	AWG26-22	5mm																							
0.5mm ²	AWG22-20	5mm																							
10A Crimp contacts HDC-HD series Cone type teeth+Cleavage Gold plated	10A 冷压针孔 HDC-HD 系列 锥形齿+劈槽 镀金	0.5	113020100913	113020601218	 																				
		0.75-1.0	113020100918	113020601325																					
		1.5	113020100919	113020601323																					
		2.5	113020100922	113020601327																					
		0.14-0.37	113020100915	113020601318																					
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Stripping length</th> </tr> <tr> <th>线规</th> <th>剥线长度</th> </tr> </thead> <tbody> <tr> <td>0.5mm²</td> <td>AWG20</td> <td>8mm</td> </tr> <tr> <td>0.75-1mm²</td> <td>AWG18</td> <td>8mm</td> </tr> <tr> <td>1.5mm²</td> <td>AWG16</td> <td>8mm</td> </tr> <tr> <td>2.5mm²</td> <td>AWG14</td> <td>6mm</td> </tr> <tr> <td>0.14-0.37mm²</td> <td>AWG26-22</td> <td>8mm</td> </tr> </tbody> </table>		Wire gauge	Stripping length	线规	剥线长度	0.5mm ²	AWG20	8mm	0.75-1mm ²	AWG18	8mm	1.5mm ²	AWG16	8mm	2.5mm ²	AWG14	6mm	0.14-0.37mm ²	AWG26-22	8mm	
Wire gauge	Stripping length																								
线规	剥线长度																								
0.5mm ²	AWG20	8mm																							
0.75-1mm ²	AWG18	8mm																							
1.5mm ²	AWG16	8mm																							
2.5mm ²	AWG14	6mm																							
0.14-0.37mm ²	AWG26-22	8mm																							
10A Crimp contacts HDC-HD series Cone type teeth+Cleavage Silver plated	10A 冷压针孔 HDC-HD 系列 锥形齿+劈槽 镀银	0.5	113020100916	113020601321	 																				
		0.75-1.0	113020100811	113020601195																					
		1.5	113020100920	113020601324																					
		2.5	113020100813	113020601197																					
		0.14-0.37	113020100812	113020601196																					
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Stripping length</th> </tr> <tr> <th>线规</th> <th>剥线长度</th> </tr> </thead> <tbody> <tr> <td>0.5mm²</td> <td>AWG20</td> <td>8mm</td> </tr> <tr> <td>0.75-1mm²</td> <td>AWG18</td> <td>8mm</td> </tr> <tr> <td>1.5mm²</td> <td>AWG16</td> <td>8mm</td> </tr> <tr> <td>2.5mm²</td> <td>AWG14</td> <td>6mm</td> </tr> <tr> <td>0.14-0.37mm²</td> <td>AWG26-22</td> <td>8mm</td> </tr> </tbody> </table>		Wire gauge	Stripping length	线规	剥线长度	0.5mm ²	AWG20	8mm	0.75-1mm ²	AWG18	8mm	1.5mm ²	AWG16	8mm	2.5mm ²	AWG14	6mm	0.14-0.37mm ²	AWG26-22	8mm	
Wire gauge	Stripping length																								
线规	剥线长度																								
0.5mm ²	AWG20	8mm																							
0.75-1mm ²	AWG18	8mm																							
1.5mm ²	AWG16	8mm																							
2.5mm ²	AWG14	6mm																							
0.14-0.37mm ²	AWG26-22	8mm																							
10A Crimp contacts HDC-HD series Two lobes teeth sleeve +Cleavage Gold plated	10A 冷压针孔 HDC-HD 系列 两瓣齿套+劈槽 镀金	0.5	115210010802	115310016102	 																				
		0.75-1.0	115210010804	115310016104																					
		1.5	115210010805	115310016105																					
		2.5	115210010901	115310016106																					
		0.14-0.37	115210010801	115310016101																					
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Stripping length</th> </tr> <tr> <th>线规</th> <th>剥线长度</th> </tr> </thead> <tbody> <tr> <td>0.5mm²</td> <td>AWG20</td> <td>8mm</td> </tr> <tr> <td>0.75-1mm²</td> <td>AWG18</td> <td>8mm</td> </tr> <tr> <td>1.5mm²</td> <td>AWG16</td> <td>8mm</td> </tr> <tr> <td>2.5mm²</td> <td>AWG14</td> <td>6mm</td> </tr> <tr> <td>0.14-0.37mm²</td> <td>AWG26-22</td> <td>8mm</td> </tr> </tbody> </table>		Wire gauge	Stripping length	线规	剥线长度	0.5mm ²	AWG20	8mm	0.75-1mm ²	AWG18	8mm	1.5mm ²	AWG16	8mm	2.5mm ²	AWG14	6mm	0.14-0.37mm ²	AWG26-22	8mm	
Wire gauge	Stripping length																								
线规	剥线长度																								
0.5mm ²	AWG20	8mm																							
0.75-1mm ²	AWG18	8mm																							
1.5mm ²	AWG16	8mm																							
2.5mm ²	AWG14	6mm																							
0.14-0.37mm ²	AWG26-22	8mm																							
10A Crimp contacts HDC-HD series Two lobes teeth sleeve +Cleavage Silver plated	10A 冷压针孔 HDC-HD 系列 两瓣齿套+劈槽 镀银	0.5	115210010807	115310016108	 																				
		0.75-1.0	115210010809	115310016110																					
		1.5	115210010810	115310016111																					
		2.5	115210010902	115310016112																					
		0.14-0.37	115210010806	115310016107																					
				<table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Stripping length</th> </tr> <tr> <th>线规</th> <th>剥线长度</th> </tr> </thead> <tbody> <tr> <td>0.5mm²</td> <td>AWG20</td> <td>8mm</td> </tr> <tr> <td>0.75-1mm²</td> <td>AWG18</td> <td>8mm</td> </tr> <tr> <td>1.5mm²</td> <td>AWG16</td> <td>8mm</td> </tr> <tr> <td>2.5mm²</td> <td>AWG14</td> <td>6mm</td> </tr> <tr> <td>0.14-0.37mm²</td> <td>AWG26-22</td> <td>8mm</td> </tr> </tbody> </table>		Wire gauge	Stripping length	线规	剥线长度	0.5mm ²	AWG20	8mm	0.75-1mm ²	AWG18	8mm	1.5mm ²	AWG16	8mm	2.5mm ²	AWG14	6mm	0.14-0.37mm ²	AWG26-22	8mm	
Wire gauge	Stripping length																								
线规	剥线长度																								
0.5mm ²	AWG20	8mm																							
0.75-1mm ²	AWG18	8mm																							
1.5mm ²	AWG16	8mm																							
2.5mm ²	AWG14	6mm																							
0.14-0.37mm ²	AWG26-22	8mm																							

5A 系列 / 10A 系列 / 重载附件 / 冷压针孔 / 5A 系列 / 10A 系列 / 重载附件 / 冷压针孔 / 5A 系列 / 10A 系列 / 重载附件 / 冷压针孔 / 5A 系列 / 10A 系列 / 重载附件 / 冷压针孔

10A Crimp contacts HDC-HD series Two lobes teeth sleeve+wrap reed Gold plated 6
 10A Crimp contacts HDC-HD series Two lobes teeth sleeve+wrap reed Silver plated 7
 10A Crimp contacts HDC-HD series Cone type teeth+wrap reed Gold plated 8
 10A Crimp contacts HDC-HD series Cone type teeth+wrap reed Silver plated 9
 16A Crimp contacts HDC-HE series Gold plated 10
 16A Crimp contacts HDC-HE series Silver plated 11

Number 序号	Description 描述 接触对	Conductor section 截面积 (mm ²)	Order number 订货号		Scale drawings 比例图	Dimension unit 尺寸单位 (mm)
			公针 Male	母针 Female		
10A Crimp contacts HDC-HD series Two lobes teeth sleeve+wrap reed Gold plated 6	Contact Pairs 10A 冷压针孔 HDC-HD 系列 两瓣齿套 + 包簧片 镀金	0.5	115210010802	115310015702		
		0.75-1.0	115210010804	115310015704		
		1.5	115210010805	115310015705		
		2.5	115210010901	115310015801		
		0.14-0.37	115210010801	115310015701		
10A Crimp contacts HDC-HD series Two lobes teeth sleeve+wrap reed Silver plated 7	10A 冷压针孔 HDC-HD 系列 两瓣齿套 + 包簧片 镀银	0.5	115210010807	115310015707		
		0.75-1.0	115210010809	115310015709		
		1.5	115210010810	115310015710		
		2.5	115210010902	115310015802		
		0.14-0.37	115210010806	115310015706		
10A Crimp contacts HDC-HD series Cone type teeth+wrap reed Gold plated 8	10A 冷压针孔 HDC-HD 系列 锥齿套 + 包簧片 镀金	0.5	113020100913	115310017302		
		0.75-1.0	113020100918	115310017304		
		1.5	113020100919	115310017305		
		2.5	113020100922	115310017306		
		0.14-0.37	113020100915	115310017301		
10A Crimp contacts HDC-HD series Cone type teeth+wrap reed Silver plated 9	10A 冷压针孔 HDC-HD 系列 锥齿套 + 包簧片 镀银	0.5	113020100916	115310017308		
		0.75-1.0	113020100811	115310017310		
		1.5	113020100920	115310017311		
		2.5	113020100813	115310017312		
		0.14-0.37	113020100812	115310017307		
16A Crimp contacts HDC-HE series Gold plated 10	16A 冷压针孔 HDC-HE 系列 镀金	0.14-0.37	114020501613	114021001576		
		0.5	114020501612	114021001577		
		0.75-1.0	114020501610	114021001582		
		1.5	114020501620	114021001591		
		2.5	114020501618	114021001590		
16A Crimp contacts HDC-HE series Silver plated 11	16A 冷压针孔 HDC-HE 系列 镀银	0.14-0.37	114020501621	114021001592		
		0.5	114020501622	114021001593		
		0.75-1.0	114020501624	114021001595		
		1.5	114020501576	114021001550		
		2.5	114020501560	114021001533		

Wire gauge 线规		Stripping length 剥线长度
0.5mm ²	AWG20	8mm
0.75-1mm ²	AWG18	8mm
1.5mm ²	AWG16	8mm
2.5mm ²	AWG14	6mm
0.14-0.37mm ²	AWG26-22	8mm

Wire gauge 线规		Stripping length 剥线长度
0.5mm ²	AWG20	8mm
0.75-1mm ²	AWG18	8mm
1.5mm ²	AWG16	8mm
2.5mm ²	AWG14	6mm
0.14-0.37mm ²	AWG26-22	8mm

Wire gauge 线规		Stripping length 剥线长度
0.5mm ²	AWG20	7.5mm
0.75mm ²	AWG18	7.5mm
1mm ²	AWG18	7.5mm
1.5mm ²	AWG16	7.5mm
2.5mm ²	AWG14	7.5mm
4mm ²	AWG12	7.5mm
0.14-0.37mm ²	AWG26-22	7.5mm